

**CARRIER CONTROL  
CARD 1**

**PEACETIME TESTING  
ACTION**

PEACETIME TESTING ACTION

THIS IS ..... CARRIER CONTROL POINT

ANY FAULT SHOULD BE REPORTED TO .....

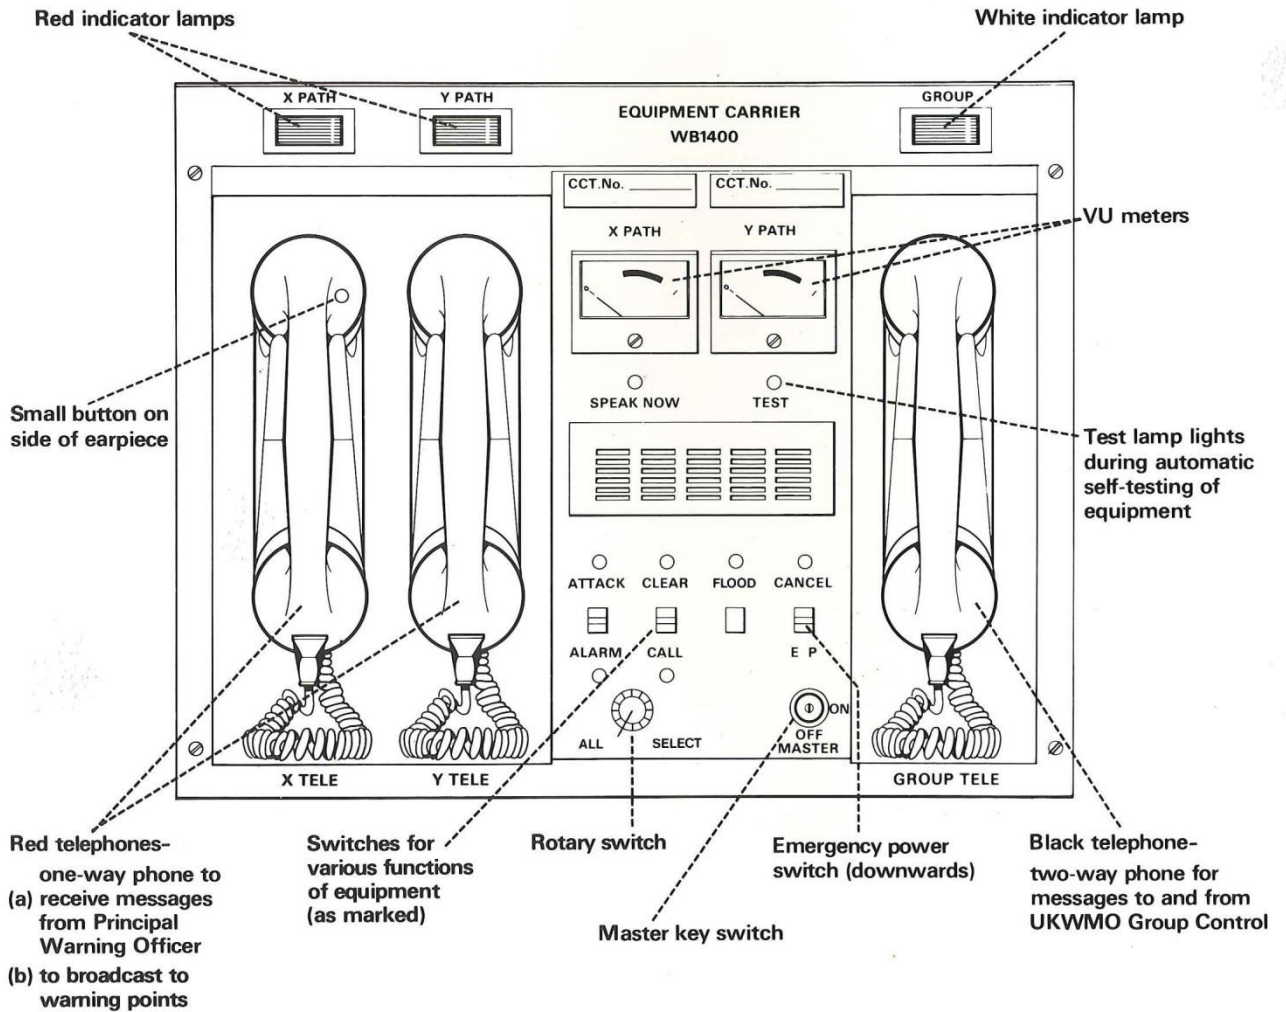


DIAGRAM OF CARRIER CONTROL EQUIPMENT

## PEACETIME TESTING ACTION

### CARRIER SYSTEM WB 1400

#### INSTRUCTIONS FOR USE OF CARRIER EQUIPMENT WB 1400

1. The equipment consists of a combined Handel Receiver and warning broadcast/siren control operating unit situated in the Carrier Control Point.
2. TESTING THE HANDEL RECEIVER

Handel Test will take place on the 1st Wednesday in January, April, July and October at 0200 hrs and 0215 hrs.

2.1 Handel Pre-test action (to be carried out at least 10 minutes beforehand):-

Lift both RED handsets.

Listen to the Speaking Clock.

Check audibility in both handsets.

Replace RED handsets.

Now study the Handel Test report form in readiness for

#### 2.2 HANDEL TEST

When one or both RED lamps flash and alarms sound,

Immediately lift both RED handsets.

Listen to the spoken message.

Replace RED handsets.

Note name of town mentioned.

- 2.3 Complete the form 'Report on Routine Test on Handel Equipment' in duplicate at once and return it to Force Headquarters the same day.

## PEACETIME TESTING ACTION

### 3. CARRIER RECEIVER TEST

This test will take place twice a year at 0900 hrs, 1500 hrs and 2000 hrs on dates to be notified. An additional broadcast will be made at 0900 hrs on the following day.

#### 3.1 Action to be taken at each test:-

Make sure you know the codeword – this is included in the detailed instructions received from Headquarters.

At the start of the test, set the rotary switch below the operating keys to ALL.

Lift one of the RED handsets.

Press CALL key downwards until the CALL lamp lights.

After an alerting CALL signal lasting 6 seconds, the SPEAK NOW lamp will flash ..... immediately

press the small button on the side of the earpiece of the RED handset and speak the following test message into the mouthpiece.

‘This is the ..... Carrier Control Point making a routine test broadcast. You will now hear a short test warning signal’.

Release handset button.

When SPEAK NOW lamp goes out, press the ALARM key downwards until the ALARM lamp lights. After a warning signal lasting 6 seconds, the SPEAK NOW lamp will flash ..... immediately

press the small button on the side of the earpiece of the RED handset and say:-

‘Now please write the Codeword (e.g. Exeter) on your routine test report form, complete the remainder of the details and post the form to Police Force Headquarters. Remember to switch OFF your loudspeaker. Thank you’.

Replace RED handset. Repeat broadcast five times at one minute intervals.

NOTE: The CCP Operator will be able to monitor satisfactory transmission of test sequences by observing that the meter needles reach the BLACK section on both scales. If the spoken message does not cause the meter needles to move use the other handset and repeat the full test sequence.